



Fido[®] X2

Ultra-Lightweight Explosives Trace Detector

The FLIR Fido X2 is an ultra-lightweight, handheld explosives trace detector (ETD). It provides an unprecedented combination of sensitivity, speed, and ease of use. Its award-winning TrueTrace™ technology detects threats with higher sensitivity and faster clear-down than similar products. Fido X2 performs fast ten-second analysis and provides cost-effective operation with reusable sampling swipes. On-device video training provides real-time help and reduces the cost and logistical burden of recurrent training. With thousands of units fielded in over 40 countries, Fido X-series products are the most trusted handheld ETDs for critical security applications.

SUPERIOR PERFORMANCE

Fido X2 is used by law enforcement in random or entry control checkpoints or during elevated threat patrol

- Broad, class-based identification
- Detects multiple types of homemade, commercial, and military explosives with a single sample
- More sensitive than other products in its class
- Reusable sampling swipes

FAST, TRUE TRACE DETECTION


Patented TrueTrace technology helps maximize system operational availability

- Analysis in less than ten seconds
- Rapid clear-down within seconds
- Fast three-minute start-up
- No radioactive ionization source or hazardous chemicals

SIMPLE, GUIDED OPERATION


From power up to power down, Fido X2 guides the user through operation

- On-screen prompts
- Simple go/no-go alarms
- On-device video training
- Ultra-lightweight <1.5 lbs (680 g)

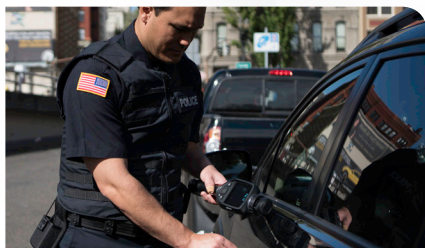

Specifications

Fido X2	
TECHNOLOGY	
Technology	FLIR TrueTrace™; multi-channel fluorescence technology; no radioactive source
SAMPLING & ANALYSIS	
Sample Introduction	Sampling swipes for surfaces
Sample Phase	Trace particulate
Threats	Detects homemade, commercial, and military explosives
Sampling & Analysis	Analysis ≤10 seconds
SYSTEM INTERFACE	
Display & Alerts	Visible, audible, and haptic (vibration) alerts; vivid, sunlight-readable color display (32k colors)
Localization	Language translation available worldwide
Communication	USB 2.0 (Mini-USB)
Data Storage	10,000 discrete files; First-in, First-out (FIFO) automatic overwrite
Data Management	On-device report generation; export to mass storage
User Levels	Operator
POWER	
Input Voltage	100-240 VAC (wall adapter supplied); runs device and charges battery simultaneously
Battery Specs	Rechargeable and swappable Li-ion battery; adapter included
Startup Time	3 minutes from cold
ENVIRONMENTAL	
Operating Temperature	32 to 113 °F (0 to 45 °C)
Operating Humidity	5% to 95% non-condensing
Storage Temperature	14 to 122 °F (-10 to 50 °C)
PHYSICAL FEATURES	
Dimensions (L x W x H)	12.7 x 3.9 x 2.8 in (32.2 x 10.0 x 7.2 cm) - with battery
Weight	1.5 lbs (680.4 g)
Enclosure & Protection	Flame retardant PC-ABS alloy with aluminum reinforcements

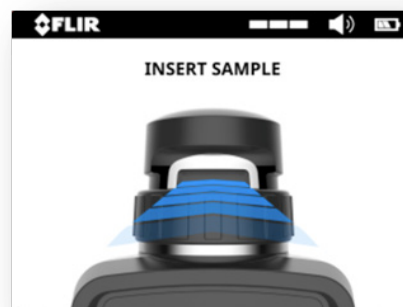

HEADQUARTERS
 FLIR Systems, Inc.
 27700 SW Parkway Ave
 Wilsonville, OR 97070

DETECTION SALES, AMERICAS
 FLIR Detection, Inc.
 2800 Crystal Drive, #330
 Arlington, VA 22202
 Phone: +1-877-692-2120
 detection@flir.com

DETECTION SALES, APAC
 FLIR Detection, Inc.
 3 Pickering Street #03-49
 Nankin Row
 Singapore - 048660
 Phone: +65-6822-1596
 detection@flir.com

DETECTION SALES, EMEA
 FLIR Detection, Inc.
 Luxemburgstraat 2
 2321 Meer
 Belgium
 Phone: +32 (0) 3665 5106
 detection@flir.com

www.flir.com
 NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2015 FLIR Systems, Inc. All rights reserved. (Updated 10/15)